



# Product Portfolio



---

RESIDENTIAL &  
LIGHT COMMERCIAL

# Residential

including energy labels (SEER/SCOP, average climate)

## Indoor units

Pair/multi application

Type	Model	Product name	Image	Multi connection only			RXZ-N			RXG-L				RXS-L					
				15	35	60	25	35	50	20	25	35	50	20	25	35	42	50	60
Wall mounted	Ururu Sarara	FTXZ-N <sup>1</sup>					A+++/A+++												
		FTXG-LW/S								A+++/A++ A+++/A++ A++/A++ A++/A+									
	Wall mounted unit	CTXS-K <sup>2</sup>																	
	Wall mounted unit	FTXS-K												A+/A++ A+/A++ A+/A++ A++/A+ A++/A+					
	Wall mounted unit	FTXS-G																A/A	
	Wall mounted unit	FTX-JV																	
	Wall mounted unit	FTX-GV <sup>1</sup>																	
Ceiling mounted	Slim concealed ceiling unit	FDXS-F (9)												A+/A+ A/A			A+/A	A/A	
Floor standing	Nexura-floor standing unit with radiant heat panel	FVXG-K							A++/A++ A++/A++ A/A+										
	Floor standing unit	FVXS-F												A+/A+ A+/A			A+/A		
Flexi type	Flexi type unit	FLXS-B (9) <sup>2</sup>												A/A B/A			A/A		

Note : (1) These indoor units can only be used in pair application  
 (2) These indoor units can only be used in multi application. For FLXS-B, remark is only valid for 60-class.

## Outdoor units

Multi application

Type	Model	Product name	Image	40	50	52	68	80	90	100	125	150	
Air Cooled	Multi heat pump	2MXS-H		A++/A+ <sup>1</sup> A++/A+ <sup>2</sup>									
		3MXS-K		A++/A+ <sup>3</sup>									
		3MXS-E				A++/A+ <sup>4</sup>							
		3MXS-G					A/A <sup>5</sup>						
		4MXS-F					A+/A+ <sup>6</sup>						
		4MXS-E						A++/A+ <sup>7</sup>					
		5MXS-E							A++/A+ <sup>8</sup>				
		RXYSQ-P8V1 VRV III-S											

Note : (1) seasonal value for combination with following indoor units : FTXS20K2V1B, FTXS20K2V1B (2) seasonal value for combination with following indoor units : FTXS25K2V1B, FTXS25K2V1B (3) seasonal value for combination with following indoor units : FTXS20K2V1B, FTXS20K2V1B (4) seasonal value for combination with following indoor units : CTXS15K2V1B, CTXS15K2V1B, FTXS20K2V1B (5) seasonal value for combination with following indoor units : CTXS15K2V1B, FTXS35K2V1B (6) seasonal value for combination with following indoor units : CTXS15K2V1B, CTXS15K2V1B, FTXS20K2V1B, FTXS20K2V1B. For seasonal data in combination with other indoor units, please consult [www.daikinneurope.com/energylabel](http://www.daikinneurope.com/energylabel) (7) seasonal value for combination with following indoor units : CTXS15K2V1B, CTXS15K2V1B, CTXS15K2V1B, FTXS35K2V1B (8) seasonal value for combination with following indoor units : CTXS15K2V1B, CTXS15K2V1B, FTXS20K2V1B, FTXS20K2V1B.

RXS-F8	RX-JV				RX-GV(B)			RXLG-L			RXL-K						
	71	20	25	35	50	60	71	25	35	50	20	25	35	42	50		
								information not yet available									
													A+/A++ A+/A+ A+/A++ A+/A+ A+/A+				
A/A																	
	A+/A++ A+/A+ A+/A+																
				A+/A+ A/A B/A													
												B/A+ A/A		A/A			
							A++/A+ A++/A A+/A+										
												B/A+ A/A		A+/A			



CONNECTABLE INDOOR UNITS	Wall mounted														Floor standing						Flexi type			Round flow cassette			Fully flat cassette				Concealed ceiling						Ceiling suspended																							
	FTXG-L				CTXS-K		FTXS-K				FTXS-G		FTX-JV		FVXG-K			FVXS-F			FLXS-B (9)			FCQG-F			FFQ-C				FDXS-F (9)			FDBQ-B/FBQ-C8			FHQ-C																							
	20	25	35	50	15	35	20	25	35	42	50	60	71	20	25	35	25	35	50	25	35	50	25	35	50	60	35	50	60	25	35	50	60	25	35	50	60	25	35	50	60																			
2MXS40H	•	•	•		•	•	•	•	•				•	•	•	•	•	•	•	•	•											•	•																											
2MXS50H	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•					•	•	•	•	•	•																											
3MXS40K	•	•	•		•	•	•	•	•				•	•	•	•	•	•	•	•	•							•	•		•	•		•	•		•	•			•	•																		
3MXS52E	•	•	•	•	•	•	•	•	•	•				•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•										
3MXS68G	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•							
4MXS68F	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•					
4MXS80E	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•				
5MXS90E	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		
RXYSQ-P8V1	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•		

# Light commercial

including energy labels (SEER/SCOP, average climate)



## Indoor units



Type	Model	Product name	Image	multi connection only	RXS-L					RZQG-L8V1/L7V1/L(8)Y1				RZQSG-L(3/8)V1/L(8)Y1				RZQ-C		RXL-K	
				25	25	35	50	60	71	100	125	140	71	100	125	140	200	250	35	50	
Ceiling mounted cassette	High COP, Round flow ceiling mounted cassette	FCQHG-F								A++/A+	A++/A++	A++/A++	A++/A+	A++/A++	A/A+						
	Round flow ceiling mounted cassette <sup>4</sup>	FCQG-F				A++/A++	A++/A++	A++/A+	A++/A+	A++/A++	A++/A+	A++/A+	A++/A+	A++/A+	A/A+			A/A++	A+/A+		
	Fully flat cassette	FFQ-C			A++/A+	A++/A+	A+/A	A+/A+										A+/A	A+/A		
Concealed ceiling	Concealed ceiling unit	FDBQ-B <sup>2</sup>																			
	Concealed ceiling unit	FBQ-C8 <sup>1</sup>				A+/A+	A+/A	A+/A	A++/A+	A+/A++	A+/A+	A+/A	A+/A	A/A				C/A	B/A		
	Large concealed ceiling unit	FDQ-C									A+/A+			A/A							
	Large concealed ceiling unit	FDQ-B <sup>1</sup>																			
Wall mounted	Wall mounted unit	FAQ-C							A++/A+	A++/A+			A+/A	A+/A+							
Ceiling suspended	Ceiling suspended unit	FHQ-C				A++/A+	A+/A	A+/A	A++/A+	A++/	A+/A+		A+/A	A+/A	A+/A+			B/A	A/A		
	4-way blow ceiling suspended unit	FUQ-C							A++/A+	A++/A+	A+/A+										
Floor standing	Floor standing unit	FVQ-C							A++/A+	A+/A+	A+/A		A/A	A/A+	A/A						

(1) Twin, triple, double twin application is only possible up to 125 class

(2) This indoor unit can only be used in multi application.

## Indoor units *Siesta*




Capacity class

Type	Model	Product name	Image	AQZS-BV1/BY1			
				71	100	125	140
Ceiling mounted cassette	4-way blow ceiling mounted cassette	ACQ-C		B/A	B/A		
Concealed ceiling	Concealed ceiling	ABQ-C		B/A	B/A		
Ceiling suspended	Ceiling suspended unit	AHQ-C		B/A	B/A		



## Outdoor Units

Pair, twin, triple & double twin application

System	Type	Product name		71	100	125	140	200	250
AIR COOLED	HEAT PUMP	RZQG-L8/L7V1/L(8)Y1 Seasonal Smart							
		RZQSG-L3/L8V1/L(8)Y1 Seasonal Classic							
		RZQ-C Super Inverter							

## Twin, triple, double twin application


		FCQH-G-F		FCQG-F			FFQ-C			FDXS-F (9)			FBQ-C8				FHQ-C				FAQ-C	FUQ-C
capacity class		71	35	50	60	71	35	50	60	35	50	60	35	50	60	71	35	50	60	71	71	71
RZQG71L8V1	RZQG71L8Y1		2				2			2			2				2					
RZQG100L8V1	RZQG100L8Y1		3	2			3	2		3	2		3	2			3	2				
RZQG125L8V1	RZQG125L8Y1		4	3	2		4	3	2	4	3	2	4	3	2		4	3	2			
RZQG140L7V1	RZQG140LY1	2	4	3		2	4	3		4	3		4	3		2	4	3		2	2	2



		FCQH-G-F		FCQG-F			FFQ-C			FDXS-F (9)			FBQ-C8				FHQ-C				FAQ-C
capacity class		71	35	50	60	71	35	50	60	35	50	60	35	50	60	71	35	50	60	71	71
RZQSG71L3V1			2				2			2			2				2				
RZQSG100L8V1	RZQSG100L8Y1		3	2			3	2		3	2		3	2			3	2			
RZQSG125L8V1	RZQSG125L8Y1		4	3	2		4	3	2	4	3	2	4	3	2		4	3	2		
RZQSG140LV1	RZQSG140LY1	2	4	3		2	4	3		4	3		4	3		2	4	3		2	2


		FCQG-F					FFQ-C		FDXS-F (9)		FBQ-C8					FHQ-C					FUQ-C		FAQ-C		FDQ-C	
capacity class		50	60	71	100	125	50	60	50	60	50	60	71	100	125	50	60	71	100	125	71	100	125	71	100	125
RZQ200C		4	3	3	2		4	3	4	3	4	3	3	2		4	3	3	2		3	2		3	2	
RZQ250C			4			2		4		4		4				2			2				2			2

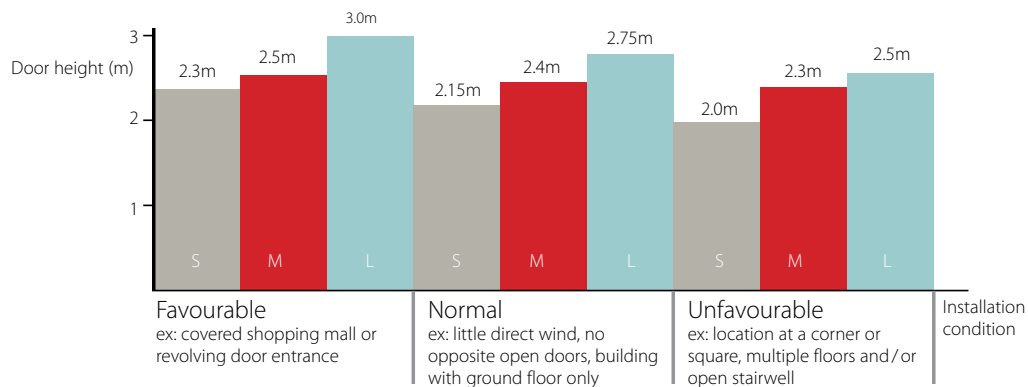

# Biddle standard air curtain range



Type	Product name	
Biddle standard air curtain free hanging	CYQ S/ML-DK-F	
Biddle standard air curtain cassette	CYQ S/ML-DK-C	
Biddle standard air curtain recessed	CYQ S/ML-DK-R	

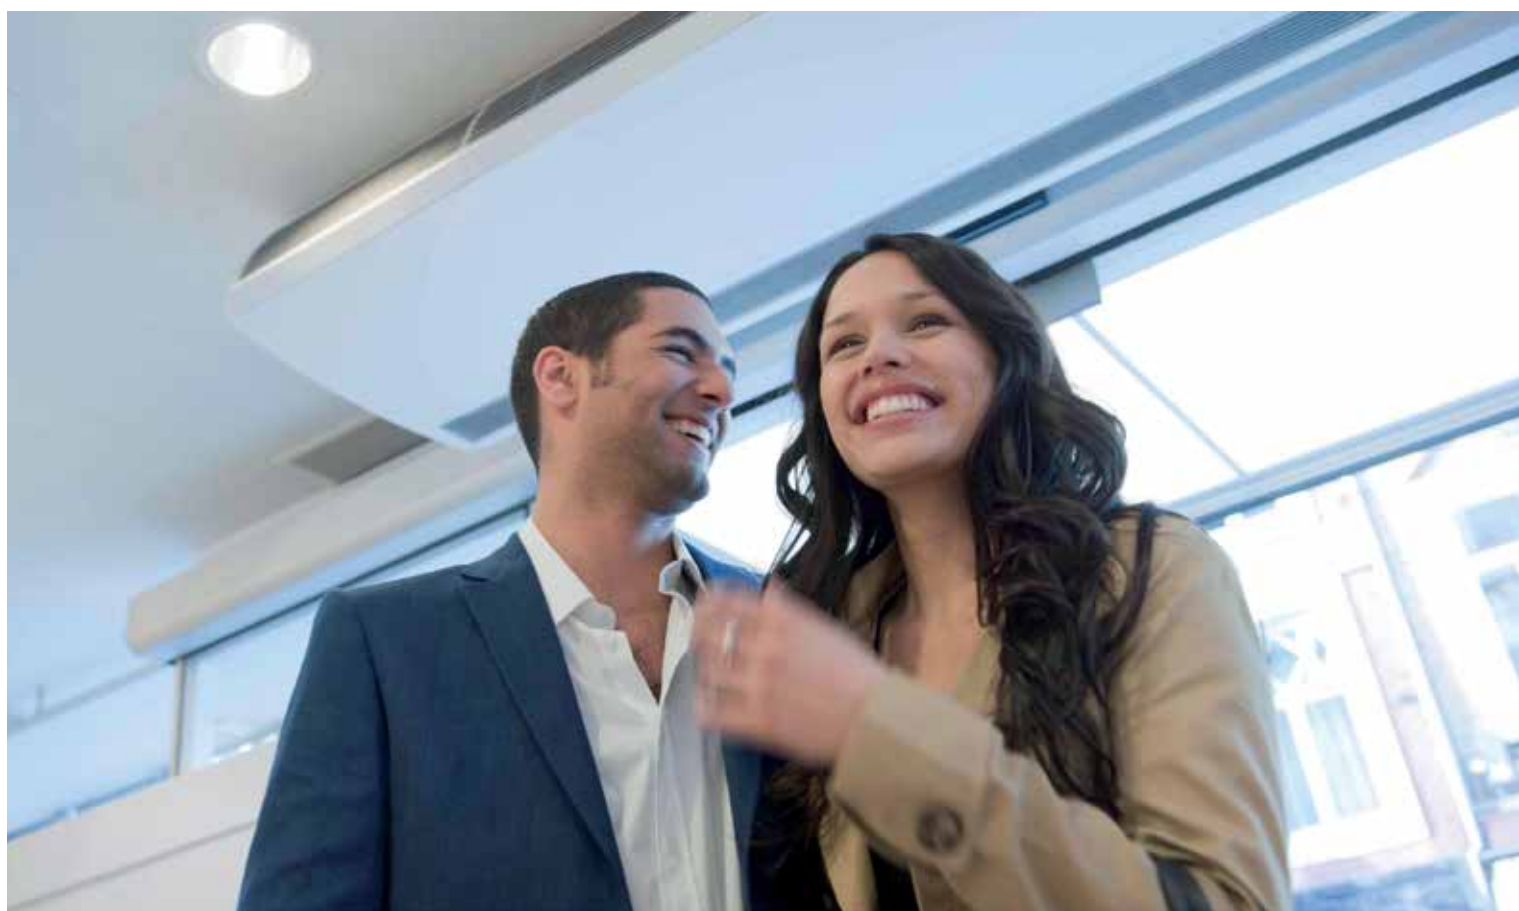

# FORM. FUNCTION. REDESIGNED.



**DAIKIN**  
emura

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU) and Fan coil units (FCU). Check ongoing validity of certificate online: [www.eurovent-certification.com](http://www.eurovent-certification.com) or using: [www.certiflash.com](http://www.certiflash.com)

FSC

ECPEN14-121

Daikin products are distributed by: