


Wall mounted unit

FTXC-B + RXC-B



sensira

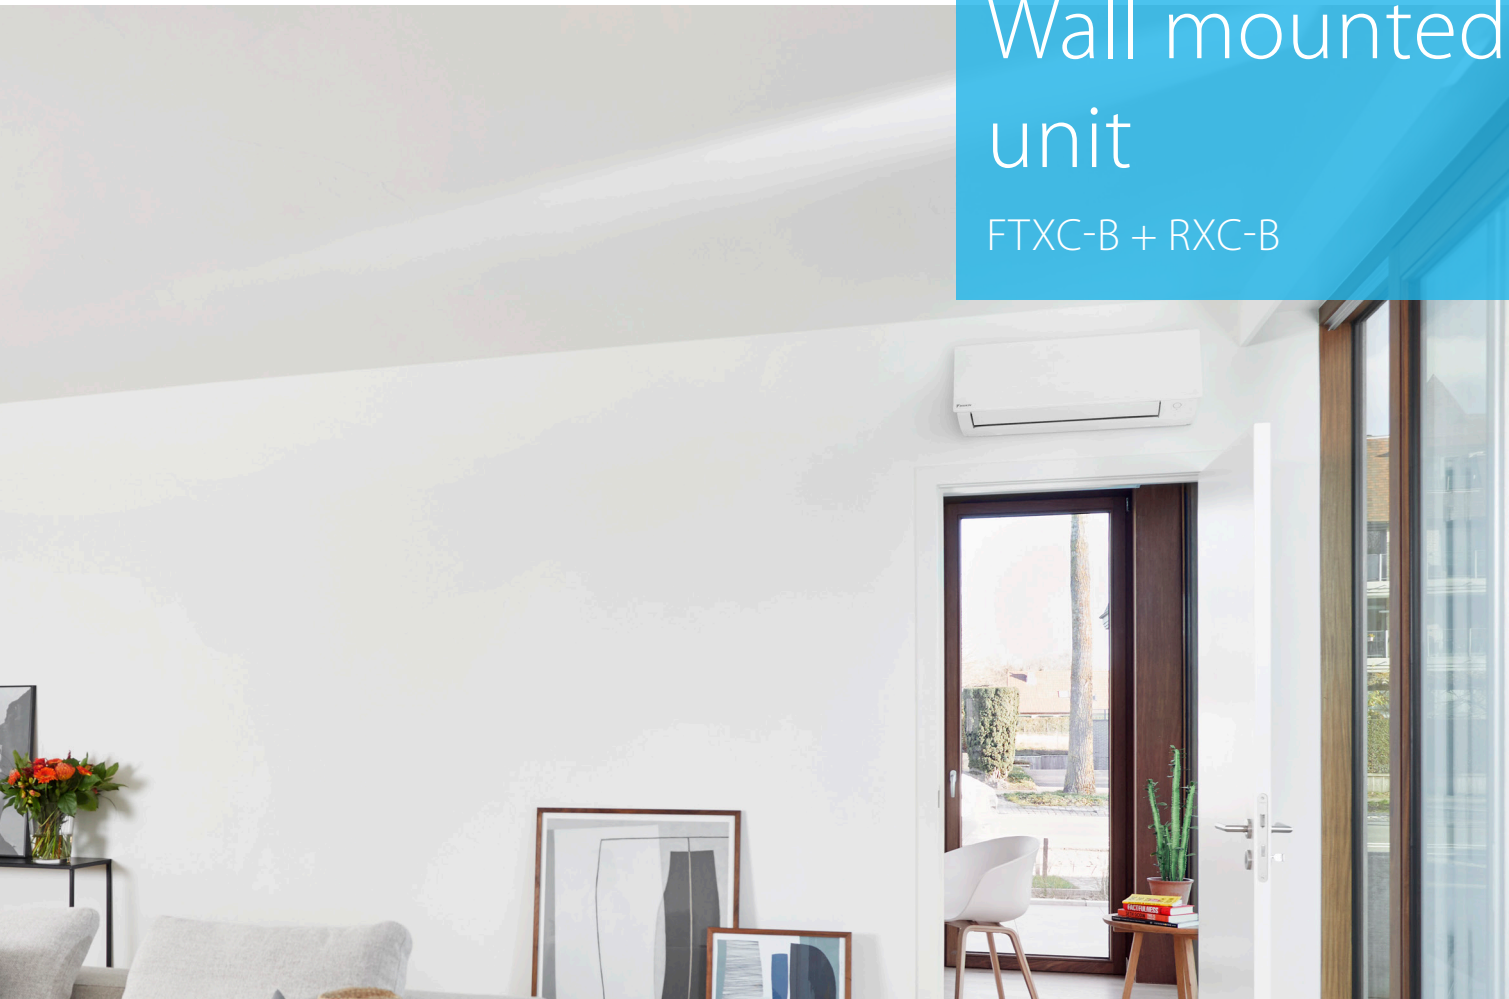

Energy saving during standby mode



Online controller via app

Wall mounted unit, offering good value for money

- › Flat, stylish front panel blends easily with any interior décor and is easier to clean
- › Online controller (optional)

- › Seasonal efficiency values up to A++ in cooling
- › Bluevolution range: lower environmental impact

FTXC-B + RXC-B



FTXC20-50B



RXC20-35B



BRC52B66

Efficiency data		FTXC + RXC	20B + 20B	25B + 25B	35B + 35B	50B + 50B	60B + 60B	71B + 71B	
Cooling capacity	Min./Max.	kW	1.30 / 3.00		1.30 / 4.00	1.37 / 6.20	1.80 / 7.00	2.30 / 7.30	
Heating capacity	Min./Max.	kW	1.30 / 4.00		1.30 / 4.80	1.36 / 6.60	1.48 / 8.00	2.30 / 9.00	
Power input	Cooling	Min./Nom./Max.	0.30 / 0.595 / 1.15	0.30 / 0.765 / 1.15	0.315 / 1.045 / 1.74	0.295 / 1.55 / 2.11	0.38 / 1.89 / 2.045	0.44 / 2.38 / 2.54	
	Heating	Min./Nom./Max.	0.275 / 0.67 / 1.35	0.275 / 0.75 / 1.35	0.275 / 1.07 / 1.57	0.27 / 1.515 / 1.85	0.325 / 1.68 / 2.35	0.50 / 2.46 / 2.74	
Space cooling	Energy efficiency class		A++					A	
	Capacity	Pdesign	kW	2.08	2.57	3.44	5.08	6.21	6.96
	SEER			6.89	6.84	6.87	6.45	6.40	5.30
Annual energy consumption		kWh/a	106	132	175	276	340	459	
Space heating (Average climate)	Energy efficiency class		A+					A	
	Capacity	Pdesign	kW	1.87	2.23	2.24	3.90	4.10	6.35
	SCOP/A			4.40	4.45	4.28	4.42	4.24	3.81
	Annual energy consumption		kWh/a	594	700	732	1,236	1,354	2,334
Nominal efficiency	EER		3.36	3.35		3.29	3.30	2.98	
	COP		3.73	3.79	3.74	3.71	3.81	3.25	
	Energy labeling	Cooling/Heating Directive	A/A					C/C	

Indoor unit		FTXC	20B	25B	35B	50B	60B	71B
Dimensions	Unit	HeightxWidthxDepth	288 x 785 x 250				297 x 1,005 x 288	
Weight	Unit		9.0		9.5		13.0	
Air filter	Type		Removable / washable					
Fan	Air flow rate	Cooling	5.4 / 6.5 / 8.8 / 10.8		5.4 / 6.5 / 9.1 / 10.8		7.4 / 8.2 / 10.2 / 12.2	
		Silent operation/Low/Medium/High					10.2 / 13.6 / 15.9 / 20.4	
Sound power level	Cooling		54		55	57	60	
Sound pressure level	Cooling	Silent operation/Low/High	20 / 26 / 38		21 / 26 / 39	29 / 33 / 45	30 / 38 / 46	
Control systems	Infrared remote control		BRC52B66					
	Wired remote control							

Outdoor unit		RXC	20B	25B	35B	50B	60B	71B	
Dimensions	Unit	HeightxWidthxDepth	550 x 658 x 273			615 x 845 x 300		695 x 930 x 350	
Weight	Unit		24		26	39		45	
Sound power level	Cooling		58		60	65	66	69	
Sound pressure level	Cooling	High	45		46	51	54		
Operation range	Cooling	Ambient	Min.~Max.	10 ~46			-10 ~46		
	Heating	Ambient	Min.~Max.				-15 ~18		
Refrigerant	Type		R-32						
	GWP		675						
	Charge		kg/TCO2Eq	0.55 / 0.371	0.75 / 0.506	1 / 0.675	1.1 / 0.743	1.15 / 0.776	
Piping connections	Liquid	OD	6.4						
	Gas	OD	9.52					12.7	
	Piping length	OU - IU	Max.	20					30
	System		Chargeless	7.5					
	Additional refrigerant charge		kg/m	0,017 (for piping length exceeding 7.5m)					
Level difference	IU - OU	Max.	15.0			20.0			
	Phase/Frequency/Voltage		Hz/V	1~/50 / 220-240					
Power supply	Maximum fuse amps (MFA)		16			20			

Daikin Europe N.V. N.V. · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412.120.336 · Oostende (Responsible Editor)



flyer.footer.eurovent

ECPEN20-045

02/2020



The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.